



## EV.WA

Warning Lamp  
İkaz Lambası

# EV.WA

## SIGNALLING FIXTURES

Sinyal Armatürleri

### INSTALLATION / KULLANIM

Hazardous Areas, Zone: 1/2 (Gases) - 21/22 (Dusts)  
Tehlikeli Sahalar, Bölge: 1/2 (Gazlar) - 21/22 (Toz)

### CLASSIFICATION/ SINIFLANDIRMA

Group II - Category 2G/2D  
Grup II - Kategori 2G/2D



### UYGULAMA

EV.W serisi akkor ya da kompakt floresan ampullü (tasarruflu) aydınlatma armatürleri Grup II tehlikeli açık ya da kapalı alanlarda kullanılmaktadır.

### APPLICATION

EV.W series incandescent or compact fluorescent lighting fixtures are used in Group II hazardous areas at indoor or outdoor services.


### ATEX 94/9/EC

Execution/Sertifika Kodu	II 2 G Ex ed IIB Gb II 2 D Ex t IIIC IP 67 Db
Installation/Kullanım Sahası	Zone 1/2 - Zone 21/22
Protection Degree/Koruma Sınıfı	IP 67
Certificate Ref./Sertifika No	MP 11 ATEX 0077.X
Rules of compl./ Uyum Kuralları	EN 60079-0:2012; EN 60079-1:2007; EN 60079-31:2009

Mechanical Characteristics		Electrical Characteristics	
Gaskets/Kafes	Nbr Rubber	Internal Wiring/Kablolar	High Temperature Resistant Silicon Cable
Cable Entry/Kablo Girişi	4x1/2" - 4x3/4" Threaded	Screws/Civata	External Stainless Steel

## Assembly

Figure 1

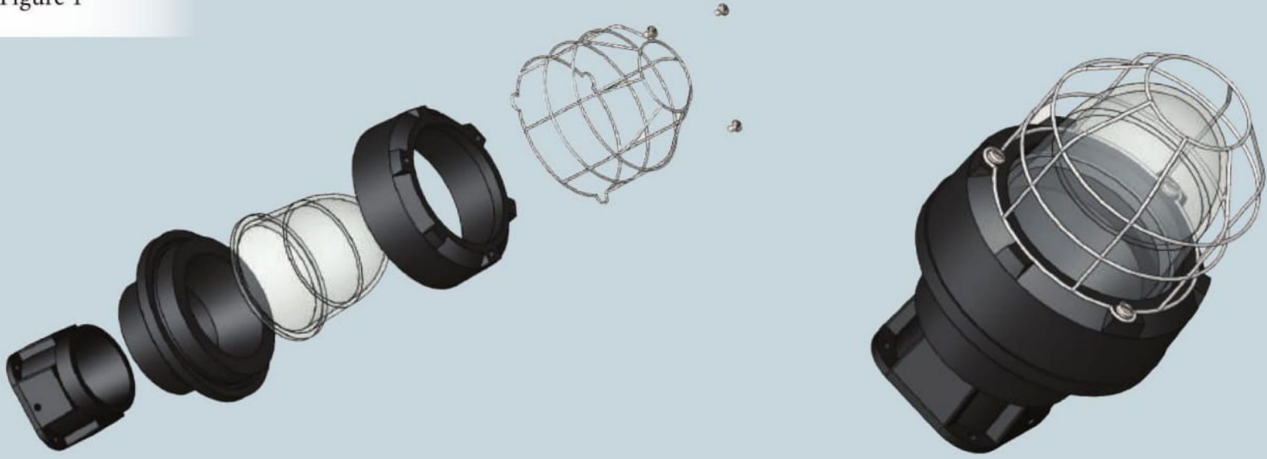

CODE

TEMP. CLASS  
(GAS)

TEMP. CLASS  
(DUST)

CABLE ENTRY SIZE

### EV SERIES LIGHTING FIXTURES TECHNICAL DATA


EV.WA

T6

T 80 °C

3/4"

Figure 4

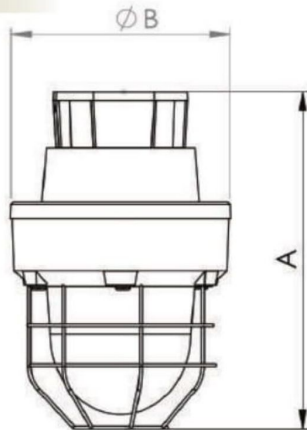

CODE/Kodu

A

C

WEIGHT/Ağırlık  
(K.G)

DETAIL/Detay

EV.WA

330 mm

180 mm

4.88 KG

Figure 3